



Smart
connections.

Data sheet

PIKO IQ 3.0-10

IQ

PIKO IQ: our power pack – flexible, communicative and practical

Flexible in use

2 MPP trackers suited to the layout of almost all roofs

Extended MPP range – perfect for repowering

Available in six power classes – perfect for every home

Smart connected

Smart Communication Board – future proof, new functions can be added via the integrated Web Application

Display, data logger, system monitoring, network and control interfaces integrated as standard, WLAN Ready via external USB WLAN adapter¹⁾

Free Solar Portal for monitoring the PV system

EEBus and Sunspec for Smart Home integration

Smart performance

Fast, self-learning shadow management – adapts individually to the installation site

Dynamic active power control and 24-hour home-consumption measurement²⁾

Easy to install

Simple device configuration using commissioning wizard


Safe installation due to clearly arranged, separate terminal compartment and protected power electronics

Compatible with RCD type A

Auto update and remote support¹⁾



PIKO IQ: compact and rapidly deployable

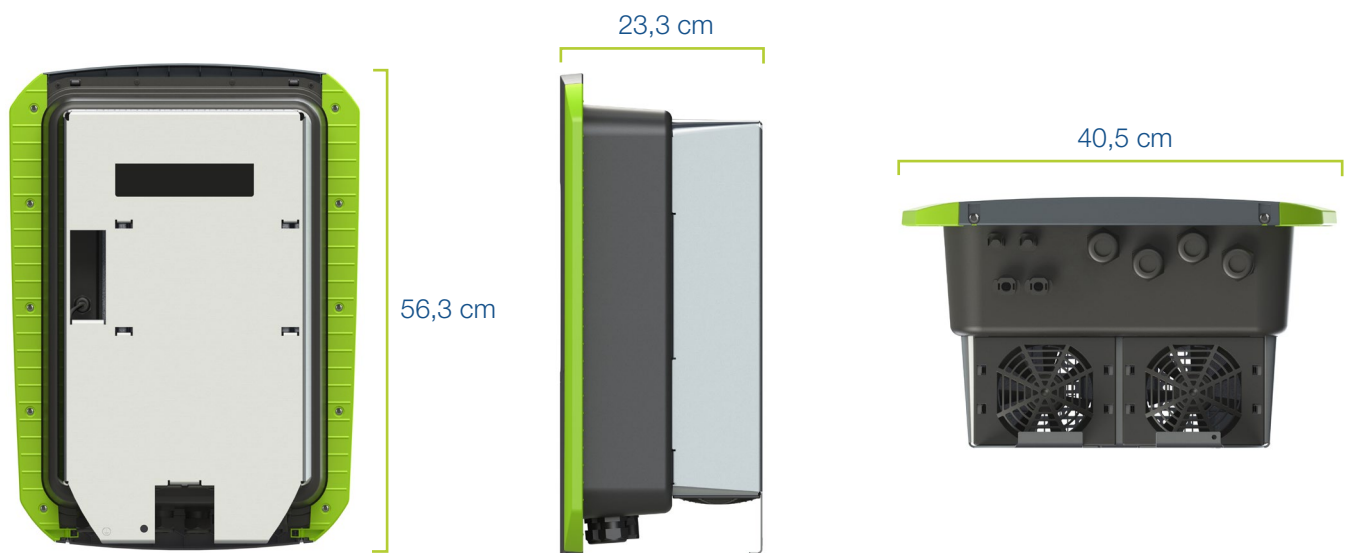

¹⁾ Available later on via software update

²⁾ KOSTAL Smart Energy Meter required

Technical data PIKO IQ

Power class			3.0	4.2	5.5	7.0	8.5	10
Input side (DC)	Max. PV power ($\cos \varphi = 1$)	kWp	4.5	6.3	8.25	10.5	12.75	15
	Max. PV power per DC input	kWp	6.5					
	Nominal DC power	kW	3.09	4.33	5.67	7.22	8.76	10.31
	Rated input voltage ($U_{DC,r}$)	V	570					
	Start-up input voltage ($U_{DC,start}$)	V	150					
	Input voltage range ($U_{DC,min} - U_{DC,max}$)	V	120...1000					
	MPP range at rated output in single-tracker operation ($U_{MPPmin} - U_{MPPmax}$)	V	240...720	350...720	450...720	-	-	-
	MPP range at rated output in two-tracker operation ($U_{MPPmin} - U_{MPPmax}$)	V	180...720 ³⁾	180...720 ³⁾	225...720 ³⁾	290...720 ³⁾	345...720 ³⁾	405...720 ³⁾
	MPP working voltage range ($U_{MPPworkmin} - U_{MPPworkmax}$)	V	120...720 ³⁾					
	Max. working voltage ($U_{DCworkmax}$)	V	900					
	Max. input current (I_{DCmax}) per DC input	A	13					
	Max. PV short-circuit current ($I_{SC,PV}$) per DC input	A	16.25					
	Number of DC inputs		2					
	Number of independent MPP trackers		2					
Output side (AC)	Rated power. $\cos \varphi = 1$ ($P_{AC,r}$)	kW	3.0	4.2	5.5	7.0	8.5	10
	Max. apparent output power. $\cos \varphi_{adj}$	kVA	3.0	4.2	5.5	7.0	8.5	10
	Min. output voltage (U_{ACmin})	V	320					
	Max. output voltage (U_{ACmax})	V	460					
	Rated output current ($I_{AC,r}$)	A	4.33	6.06	7.94	10.10	12.27	14.43
	Max. output current (I_{ACmax})	A	4.81	6.74	8.82	11.23	13.63	16.04
	Short-circuit current (peak/RMS)	A	6.8/4.8	9.5/6.7	12.5/8.8	15.9/11.2	19.3/13.6	22.8/16.1
	Grid connection		3N~. 400V. 50 Hz					
	Rated frequency (f_r)	Hz	50					
	Min/max grid frequency (f_{min}/f_{max})	Hz	47/52.5					
	Setting range of the power factor ($\cos \varphi_{AC,r}$)		0.8...1...0.8					
	Power factor for rated power ($\cos \varphi_{AC,r}$)		1					
	Max. THD	%	3					
	Standby/standby incl. 24h home-consumption measurement	W	4.5/7.9					
η	Max. efficiency	%	97.1	97.1	97.1	97.2	97.2	97.2
	European efficiency	%	95.3	95.5	96.2	96.5	96.5	96.5
	MPP adjustment efficiency	%	99.9	99.9	99.9	99.9	99.9	99.9

Power class			3.0	4.2	5.5	7.0	8.5	10	
System data	Topology: Without galvanic isolation – transformerless		✓						
	Protection class according to IEC 60529		IP 65						
	Protective class according to IEC 62103		I						
	Overvoltage category according to IEC 60664-1, input side (PV generator)		II						
	Overvoltage category according to IEC 60664-1, output side (grid connection)		III						
	Degree of contamination		4						
	Environmental category (outdoor installation)		✓						
	Environmental category (indoor installation)		✓						
	UV resistance		✓						
	AC cable diameter (min-max)	mm	8...17						
	AC cable cross-section (min-max)	mm ²	1.5...6			2.5...6		4...6	
	DC cable cross-section (min-max)	mm ²	2,5...6						
	Max. fuse protection on output side		B16/C16						B25/C25
	Internal operator protection according to EN 62109-2 (compatible with RCD type A from FW 01.14)		✓						
	Independent disconnection device according to VDE 0126-1-1		✓						
	Height/width/depth	mm (in)	563 / 405 / 233 (22.17 / 15.94 / 9.17)						
	Weight	kg (lb)	17.9 (39.46)			19.9 (43.87)			
	Cooling principle – regulated fans		✓						
	Max. air throughput	m³/h	184						
	Noise emission (typical)	dB(A)	39						
	Ambient temperature	°C (°F)	-20...60 (-4...140)						
	Max. installation altitude above sea level	m (ft)	2000 (6562)						
	Relative humidity	%	4...100						
Connection technology, DC side		SUNCLIX plug							
Connection technology, AC side		Spring-type terminal strip							
Interfaces	Ethernet LAN (RJ45)		1						
	Connection of energy meter for collecting energy data (Modbus RTU)		1						
	Digital inputs (e.g. for digital ripple control receiver)		4						
	USB 2.0		1						
	Potential-free contact for self-consumption control		1						
	Webserver (user interface)		✓						
Warranty ¹⁾	Years	5 (2)							
Optional warranty extension for (years)		5/10/15							
Directives/Certification ²⁾		CE, GS, CEI 0-21, CEI10/11, EN 62109-1, EN 62109-2, EN 60529, EN 50438*, EN 50549-1*, ENA/EEA, G98, G99, IFS2018, IEC 61727, IEC 62116, RD 1699, RFG, TOR Erzeuger, UNE 206006 IN, UNE 206007-1 IN, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105, VJV2018							

Subject to technical changes. Errors excepted. You can find current information at www.kostal-solar-electric.com. Manufacturer: KOSTAL Industrie Elektrik GmbH, Hagen, Germany

¹⁾ 5-year warranty only after registration in the KOSTAL Solar online shop


²⁾ Does not apply to all national annexes

³⁾ MPP range of 120 V...180 V (with limited current of 9.5-13 A). MPP range of 680 V...720 V (with limited current of 11 A). Detailed layout can be seen in KOSTAL (PIKO) Solar Plan.


PIKO IQ available in 6 power classes




PIKO IQ 3.0

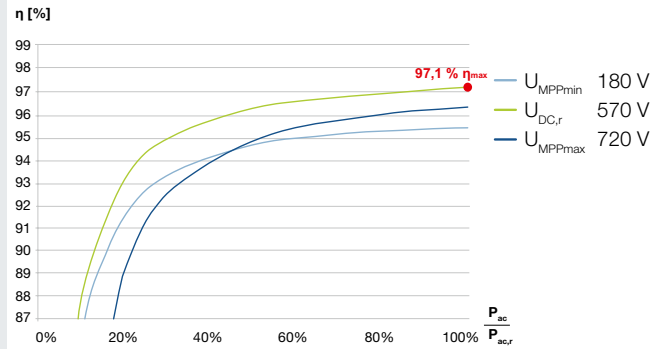


PIKO IQ 4.2

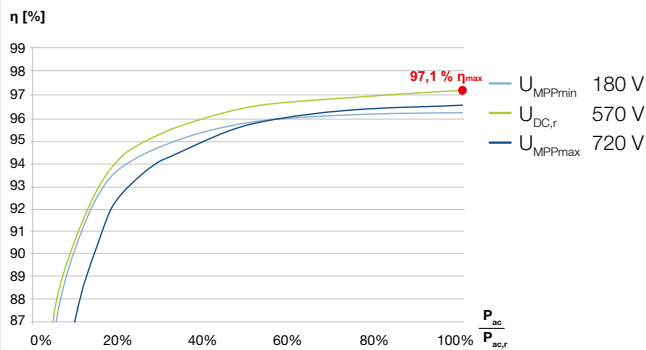


PIKO IQ 5.5

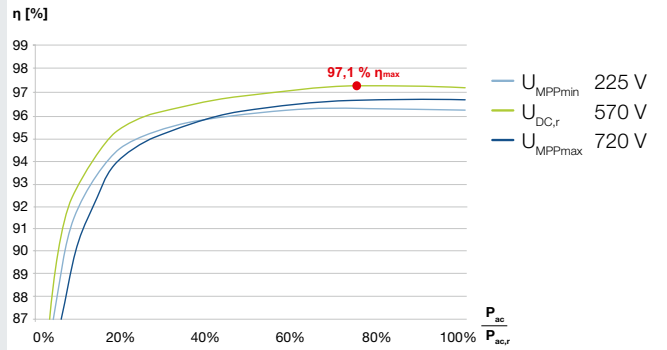


PIKO IQ 7.0

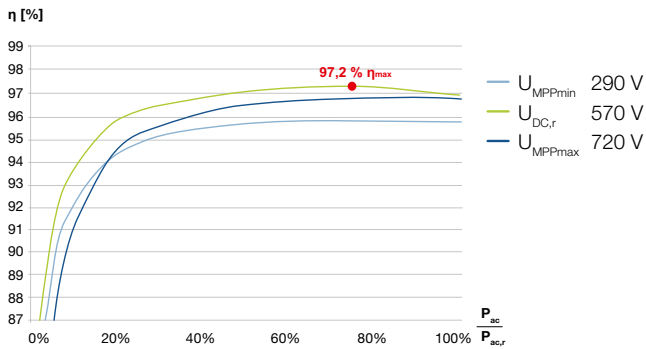

PIKO IQ 8.5

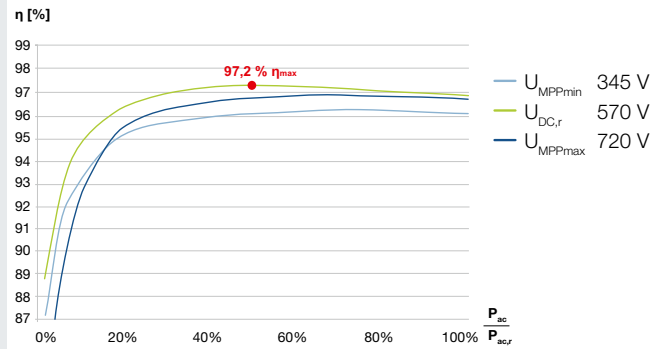

PIKO IQ 10

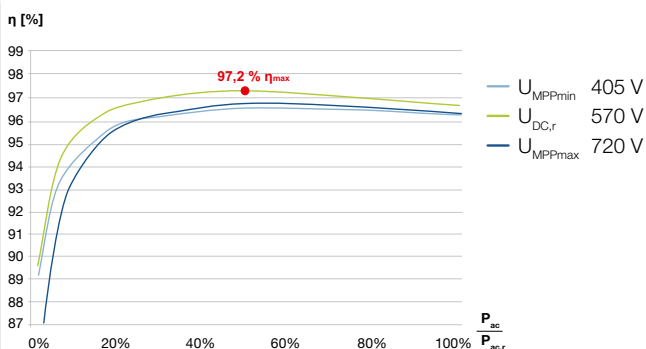

Services for our products

FAQs:
kostal-solar-electric.com/Service_Support

Product registration, warranty extension or purchase of accessories: shop.kostal-solar-electric.com

Get in touch: service-solar@kostal.com



KOSTAL Solar Electric GmbH
Hanferstr. 6
79108 Freiburg i. Br.
Deutschland
Telefon: +49 761 47744 - 100
Fax: +49 761 47744 - 111

KOSTAL Solar Electric Ibérica S.L.
Edificio abm
Ronda Narciso Monturiol y Estarriol, 3 Torre
B, despachos 2 y 3
Parque Tecnológico de Valencia
46980 Valencia
España
Teléfono: +34 961 824 - 934
Fax: +34 961 824 - 931

KOSTAL Solar Electric France SARL
11, rue Jacques Cartier
78280 Guyancourt
France
Téléphone: +33 1 61 38 - 4117
Fax: +33 1 61 38 - 3940

KOSTAL Solar Electric Hellas E.Π.Ε.
47 Steliou Kazantzidi st., P.O. Box: 60080 1st
building – 2nd entrance
55535, Pilea, Thessaloniki
Ελλάδα
Τηλέφωνο: +30 2310 477 - 550
Φαξ: +30 2310 477 - 551

KOSTAL Solar Electric Italia Srl
Via Genova, 57
10098 Rivoli (TO)
Italia
Telefono: +39 011 97 82 - 420
Fax: +39 011 97 82 - 432

KOSTAL Solar Elektrik Turkey
Mahmutbey Mah. Taşocağı Yolu Cad.
No:3 (B Blok), Ağaoğlu My Office 212
Kat:16, Ofis No:269
Bağcılar - İstanbul / Türkiye
Telefon: +90 212 803 06 24
Faks: +90 212 803 06 25

www.kostal-solar-electric.com