


Flat Roof Mounting System TRIC F duo



Wagner Solar

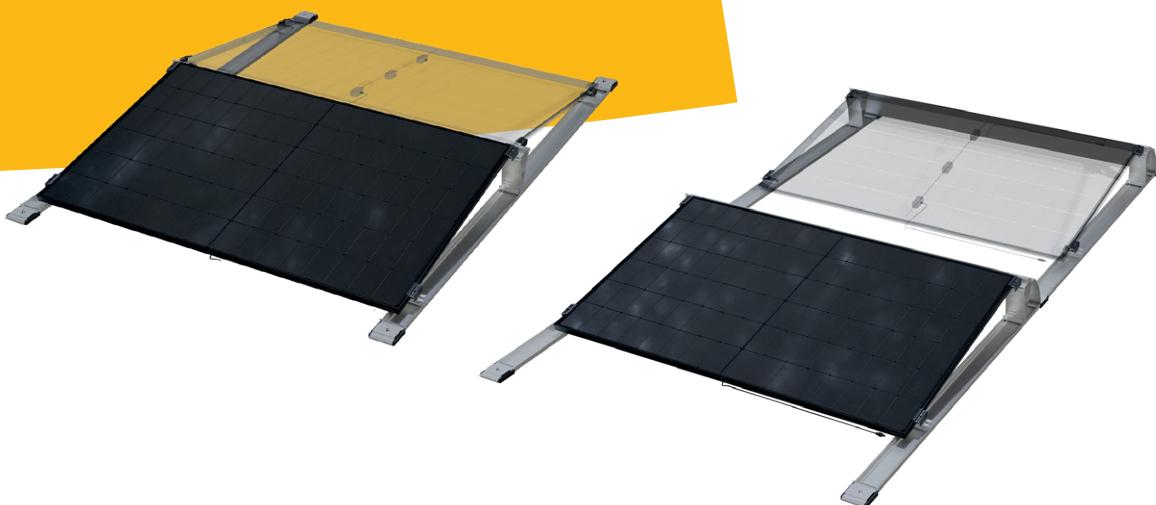

TRIC F duo - a ballasted, highly flexible and compact mounting system for all conventional flat roofs. The sophisticated system convinces with low material use, easy assembly and short rail lengths facilitating handling. This reduces costs and increases profitability.



STANDOUTS

- **Low system costs**
- **Highly flexible**
- **Very fast installation**
- **Simple project planning**

DETAILS

The material-optimized, intelligent design cuts costs in three ways: the use of materials, during transport and during installation.

One system for southern (10°/17°/18°) and east-western (10°) mounting. The flexible, pluggable and segmental design is self-aligning, adapts to all substrates and surfaces and also forgives uneven roofing.


The simple system design and lightweight construction reduce assembly times considerably. Building protection mats are only required to cover the rail ends.

Our SUNoptimo design tool provides you with comprehensive support during planning, optimizes ballasting and thus reduces the additional roof load.



Flat Roof Mounting System

TRIC F duo

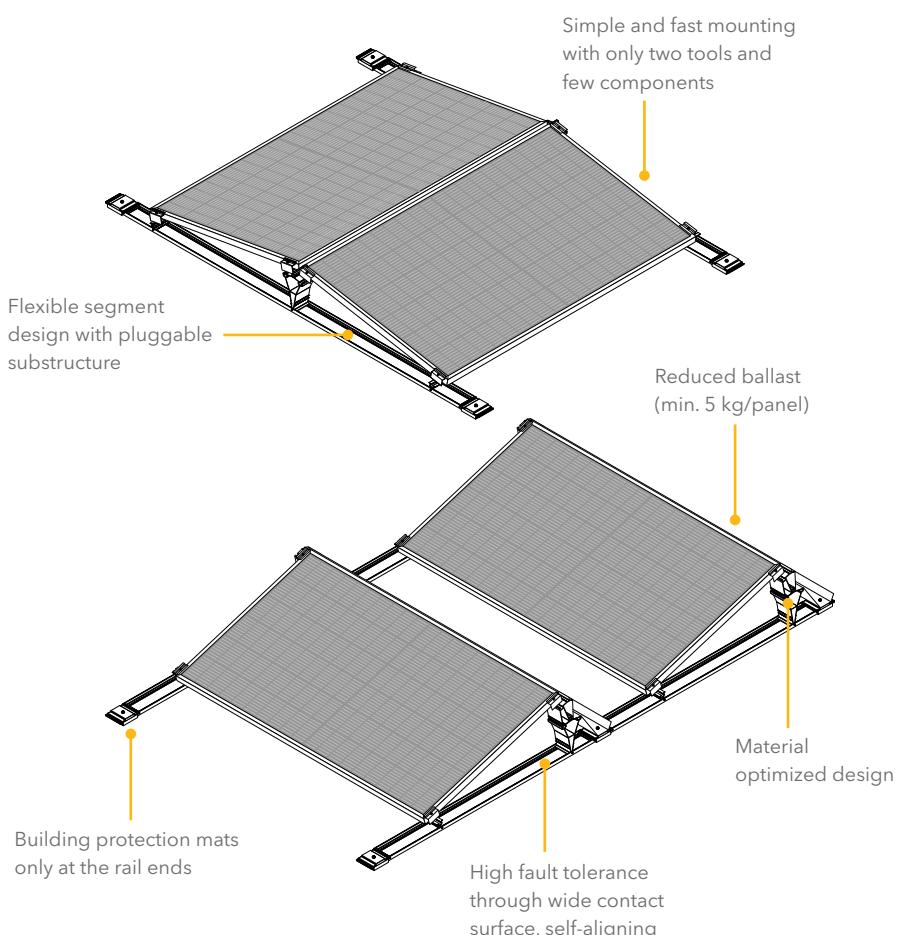

Technical Data	TRIC F duo
Application	Foil, bitumen, gravel and green roofs up to 5 ° roof pitch Aerodynamically optimized, no roof penetration, ballasting with concrete slabs
Panel orientation	Landscape; Pitch south 10°, 17° or 18°; pitch east/west 10°; for all common framed modules
Ballast	Normal roof zone min. 5 kg/panel; corner zones min. 20 kg/panel
Structural roof load	Min. 12 kg/m ²
Material	Aluminium and stainless steel
Product warranty	15 years