


# Roof Bracket System TR fix



**Wagner Solar**

ENERGIETECHNIK  
ENERGY TECHNOLOGY  
TECHNOLOGIE ÉNERGÉTIQUE  
ENERGIETECHNIEN

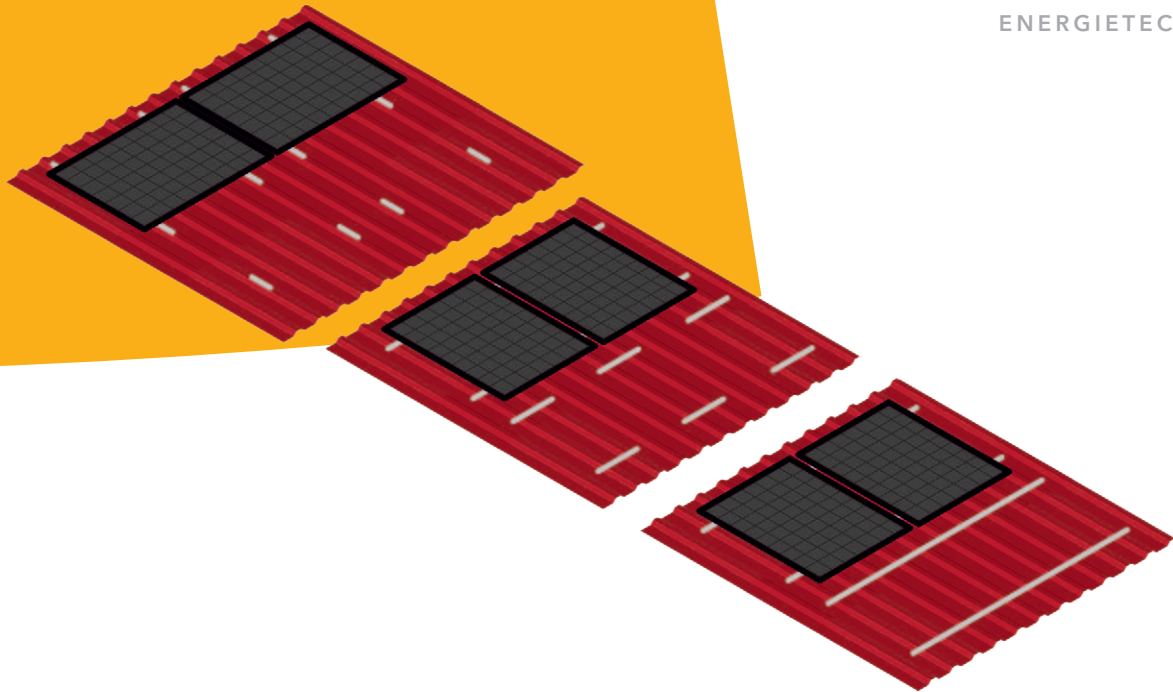

## Roof bracket system TR fix for rapid mounting on shed roofs

Enormously flexible applications with options of short rail segments or continuous mounting rails and sheet metal screws or rivets in combination with the patented module clamp TRIC clip.



### STANDOUTS

- **Fast and simple installation**
- **Two rail variants**
- **Safe fastening**
- **Economic system pricing**


### DETAILS

TR fix is fastened directly to the high beads of the trapezoidal sheet. In combination with the patented module clamp TRIC clip the installation becomes child's play.

Depending on project requirements it is possible to either work with long, continuous rails or with short rail segments. This way the most economic solution is applied to each case.

Depending on the trapezoidal sheets' properties and the structural conditions, sheet metal screws or rivets are recommended. They establish a secure connection to the roof structure.

For each application case the most economic solution is chosen. Low material costs and short installation cycles combine into highly attractive systems pricing.

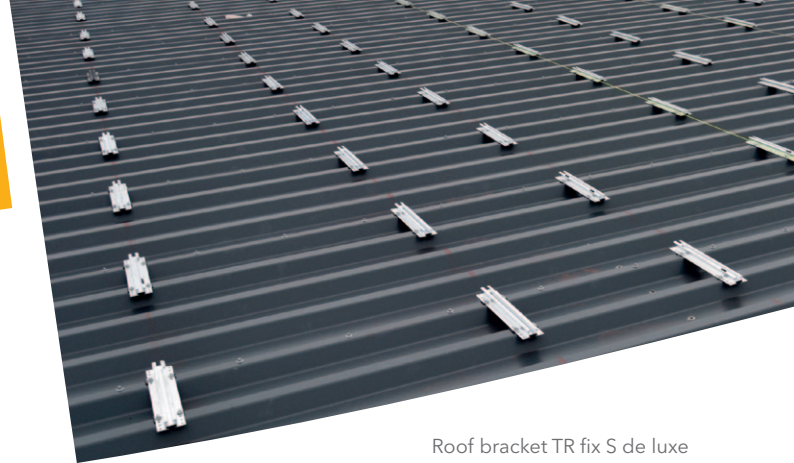


Roof bracket TR fix S de luxe




### Roof Brackets TR fix S de luxe with Short Mounting Rails

- Mounting with self-drilling screws or blind rivets with sealing washer
- Rails punched and pasted with sealing neoprene underlays



### Roof Brackets TR fix compact with Short Mounting Rails

- Mounting with self-drilling screws
- Rails punched and pasted with sealing neoprene underlays

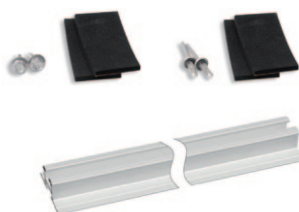

### Roof Brackets TR fix L with Long Mounting Rails

- Mounting with self-drilling screws or blind rivets with sealing washer
- Mounting rail TR fix Profil, sealing neoprene underlays

Technical Data	TR fix S de luxe	TR fix compact	TRfix L
Application	Trapezoidal Sheet Roofings (Sandwich roofs with approval)		
Rail variants	Short punched rails 395 mm	Short punched rails 125 mm	Continuous rails 5.250 / 5.400 / 6.000 mm
Fastening variants	Self drilling sheet metal screws or rivets for steel sheeting from 0,5 mm	Self drilling sheet metal screws for steel sheeting from 0,5 mm	Self drilling sheet metal screws or rivets for steel/aluminium sheeting from 0,5 mm
Module types	For all common framed modules		
Material	Aluminum, stainless steel, neoprene, EPDM		
Product warranty	10 years		